



DeckMates


Flashings for metal roof and wall systems

Deck-Mate flashings incorporate a stepped profile, which creates a compression seal between the schedule 40 piping and the flashing. Deck-Mates are designed with proper reinforcing ribs to allow the flashing to maintain rigidity in the shape of the product. By combining the stepped profile and the reinforcing ribs the product will properly accommodate the use of a stainless steel clamp. The clamp is crucial in maintaining a water-tight seal for many years.

Other products in the market use caulk to seal the penetration. The National Roofing Contractor Association states in their 'Better Roofing Practices' that caulk should never be used as a primary sealer. Deck-Mates feature a time-tested design and proper roofing technique to produce the most effective metal roof flashing in the industry.

Deck-Mates are designed to accommodate projections from .125"-26" in diameter and work in conjunction with any configuration of corrugated metal roof. The product is engineered to incorporate a dead soft aluminum flange that bends to any contour, roof irregularity or pitch. The Deck-Mate is available in two styles: the standard for normal penetration and Retrofit for piping that cannot be disconnected. The flashings are also available in two materials: the standard EPDM and high temperature Silicone.

portalsplus.com
P (800) 774-5240
F (855) 549-2675

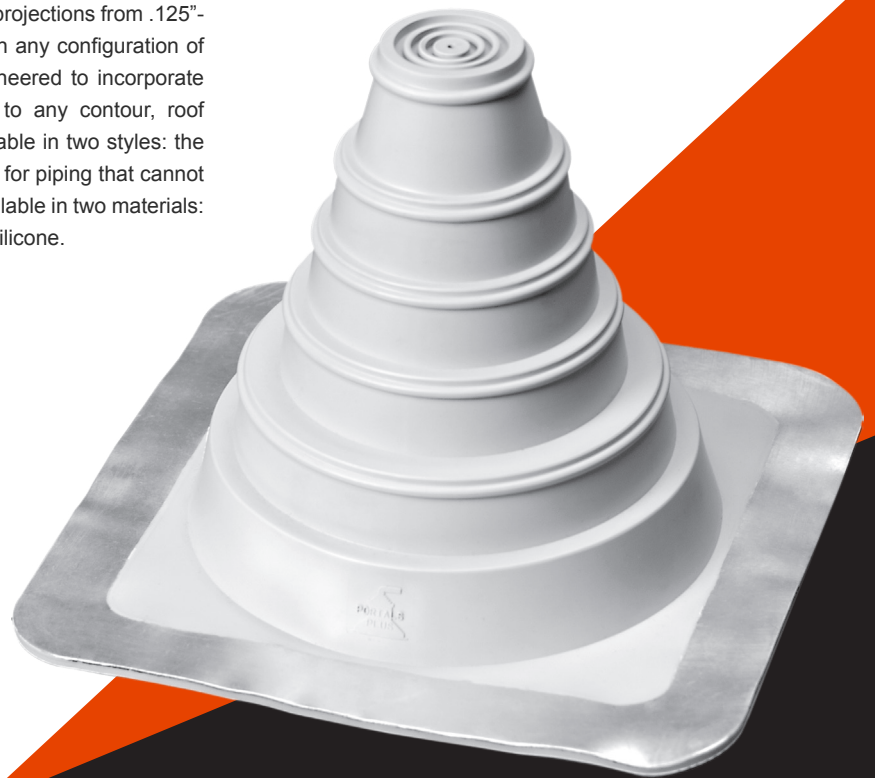



Specification

Provide pre-manufactured Deck-Mate flashing systems as manufactured by Roof Products & Systems, at all necessary roof penetrations 26" or less, or as shown on drawings. Each Deck-Mate flashing system shall include a molded EPDM pipe boot with stepped sides to accommodate various pipe sizes with an integral aluminum flange. EPDM rubber shall have a

serviceable temperature range of -60°F to +270°F and be resistant to ozone and ultraviolet rays. Silicone shall have a serviceable temperature range of -100°F to +500°F. Each Deck-Mate shall include a stainless steel clamp for positive securement of the Deck-Mate to the pipe.

Sizing Chart

Model	Size (O.D. of pipe)	A	B
D.M. 0	.125"-.75"	.85"	2.25"
D.M. 1	.25"-2"	3.25"	5"
D.M. 2	1.25"-3"	4.5"	6.25"
D.M. 3	.25"-4"	5.5"	7.5"
D.M. 4	3"-6"	4.5"	10"
D.M. 5	4"-8"	4"	12.5"
D.M. 6	5"-9"	5"	12.5"
D.M. 7	6"-11"	6.25"	17"
D.M. 8	7"-13"	6.25"	18"
D.M. 9	10"-18"	4.75"	22.5"
D.M. 10	13"-26"	6.25"	30.5"

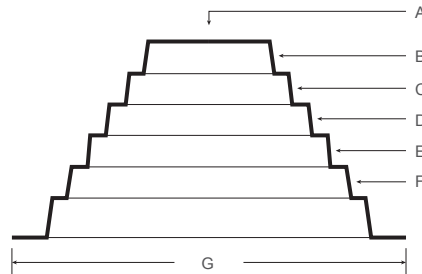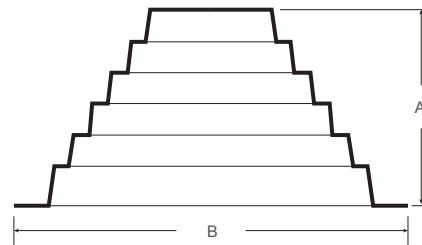

All sizes shown are in inches

	DM0	DM1	DM2	DM3	DM4	DM5	DM6	DM7	DM8	DM9	DM10
A		0.3		0.5							
		0.8 - 1.0		0.5 - 0.7							
		1.1 - 1.3		0.7 - 1.1							
		0.1 - 0.9		1.1 - 1.3							
B	1.4 - 1.7	1.45 - 1.65	1.3 - 1.65	3.25 - 4.25	4.2 - 5.4	5.4 - 6.4	6.4 - 7.4	7.4 - 8.4	7.4 - 8.4	10.5 - 12.5	12.5 x 13.8
C	1.8 - 2.3	2.1 - 2.6	2.1 - 2.6	4.25 - 5.3	5.4 - 6.4	6.4 - 7.4	7.4 - 8.4	8.4 - 9.4	8.4 - 9.4	12.5 x 13.8	13.8 x 15.8
D		2.6 - 3.25	3.25 - 4.25	5.3 - 6.4	6.4 - 7.4	7.4 - 8.4	8.4 - 9.4	9.4 - 10.5	9.4 - 10.5	13.8 - 15.8	15.8 x 17.8
E				6.4 - 6.9	7.4 - 8.4	8.4 x 9.4	9.4 - 10.5	10.5 - 11.5	10.5 - 11.5	15.8 - 17.8	17.8 x 19.8
F								10.5 - 11.5	11.5 - 12.5		19.8 x 25.8
G	2.25 x 2.25	5 x 5	6.25 x 6.25	7.6 x 7.6	9.7 x 9.7	12.3 x 12.3	12.3 x 12.3	17 x 17	18.2 x 18.2	24.8 x 24.8	30.2 x 30.2

portalsplus.com / P (800) 774-5240 / F (855) 549-2675