


Instruction Manual Vertical Debris Netting System

Use: The netting system is designed to contain debris and can be used as a guardrail system.

Note: The netting is to be used in vertical applications only. Do not use over holes, gaps, or as fall protection of personnel. Do not use any damaged panels, plates, or clips.

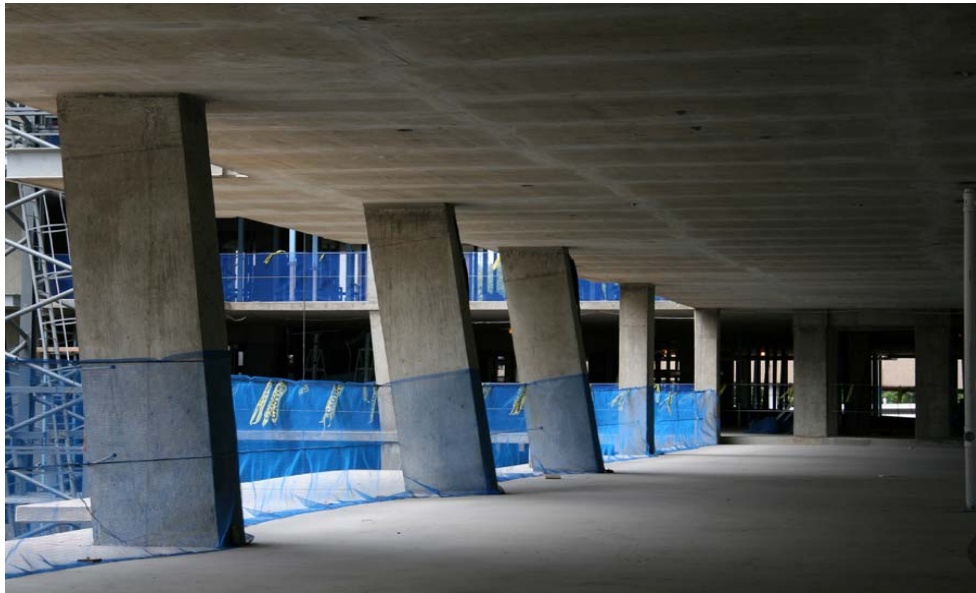

Installation of Netting: A steel cable is used to provide support at the top of the system. Please note that this cable is not provided by Guardian Fall Protection. The user is responsible for installation of the cable and making sure that it meets all federal, state, and local regulations. The following steps will outline the recommended installation procedure.

1. Place the clips over the top edge of the net and the cable, spacing each clip every two feet. Press firmly on the clip to ensure that it is locked firmly into place.
2. The selvage strip at the bottom of the net has to be on the inside of the toe board and should reach the floor without excessive pulling on the cable.
3. Through the use of tie-down plates, fasten the bottom selvage strip of the netting to the floor spacing the plates every two feet. Position the plate on the bottom strip making sure to place the nail midway between the edges. The nail head must be flush with the plate to ensure that the netting is securely fastened to the floor.

Note: To combine multiple 150 foot panels it is recommend that the panels be overlapped 18 inches top and bottom and the plates should be fastened through both corners in the overlap.

